

ANGLE HOSE VALVE

MODEL LHV






EX27402



2-1/2 GROOVED INLET x NST;





2-1/2 NPT x MNST, NYCC, NDNY, FNST, MPHX, MTEMPE



1-1/2 NPT x MNST, or FNST

Lansdale Angle Hose Valves feature all brass construction with cast bodies for rigidity and light weight. Rated to 300 lbs. These valves can be used with a Fire Hose Rack Assembly or as a Fire Department Connection outlet.


FEATURES:

• Sizes: 1-1/2", 2-1/2"

• Maximum Inlet Pressure: 300 psi

• Inlet Connection: FNPT or Grooved

• Outlet Connection: Male Hose, FNPT, Special Thread (optional)



MATERIAL


• Valve Body: Brass C37700

• O-Rings: EPDM (A70)

• Handwheel: Aluminum A03600

• Handwheel Bolt: Brass C37700

• Handwheel Washer: 304 Stainless Steel



*female outlet

DIMENSIONS & WEIGHTS								
TYPE	A OPEN	A CLOSED	B (IN)	C (IN)	D (IN)	E (IN)	WEIGHT (LBS)	
а	11-1/2	9-7/8	5	3-5/8	3-1/8	na	9	
af*	11-1/2	9-7/8	5	3-5/8	3-3/8	na	9	
b	10-5/8	8-7/8	5	2-3/4	3-1/8	3-1/2	8	
bf*	10-5/8	8-7/8	5	2-3/4	3-3/8	3-3/4	8	
С	7-3/4	6-3/4	4	2	2-1/2	2-3/4	4	
cf*	7-3/4	6-3/4	4-1/8	2	2-5/8	2-7/8	4	

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	□ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

Revision: 3/2022



ANGLE HOSE VALVE


MODEL LVLHV





EX7402



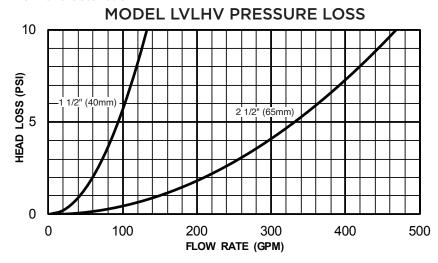

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	□ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	