




CAST IRON FLANGED 90° ELBOW

MODEL LVCIF90
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

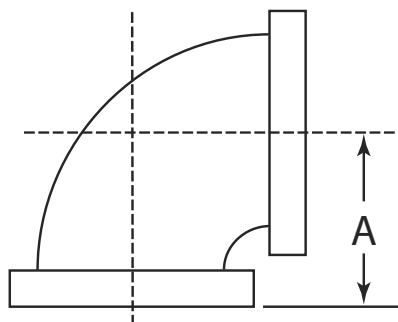

*Contact Lansdale for UL Listing (BBP)

Size	A	Flange Dia.	Thickness		Unit Weight
			Min. Flange	Wall	
NPS	IN.	IN.	IN.	IN.	LBS.
2	4½	6	5/8	5/16	14.00
2½	5	7	11/16	5/16	19.00
3	5½	7½	¾	3/8	25.00
4	6½	9	15/16	1/2	45.00
5	7½	10	15/16	1/2	52.00
6	8	11	1	9/16	65.00
8	9	13½	1 1/8	5/8	105.00
10	11	16	1 3/16	¾	165.00
12	12	19	1 ¼	13/16	235.00

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		




CAST IRON FLANGED 90° REDUCING ELBOW

MODEL LVCIFR90
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

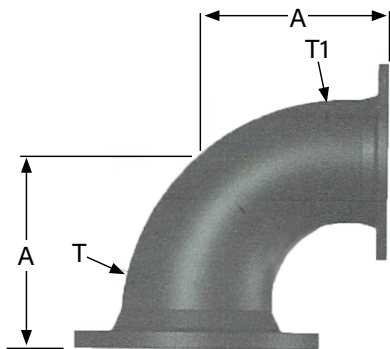

*Contact Lansdale for UL Listing (BBP)

Size	A	R	T	T1	Weight
3 X 2	5.5	4.0	.38	.31	19
3 X 2½	5.5	4.0	.38	.31	22
4 X 2	6.5	4.0	.50	.31	29
4 X 2½	6.5	4.0	.50	.31	31
4 X 3	6.5	4.5	.50	.38	33
5 X 3	7.5	5.0	.50	.50	44
5 X 4	7.5	5.0	.56	.50	48
6 X 3	8.0	6.0	.56	.38	45
6 X 4	8.0	6.0	.56	.50	55
6 X 5	8.0	6.0	.56	.50	65
8 X 4	9.0	7.0	.62	.50	75
8 X 5	9.0	7.0	.62	.56	80
8 X 6	9.0	7.0	.62	.56	85
10 X 4	11.0	9.0	.75	.50	110
10 X 6	11.0	9.0	.75	.56	135
10 X 8	11.0	9.0	.75	.62	150
12 X 4	12.0	10.0	.81	.50	140
12 X 6	12.0	10.0	.81	.56	160
12 X 8	12.0	10.0	.81	.62	180
12 X 10	12.0	10.0	.81	.75	210

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	




CAST IRON FLANGED 90° BASE ELBOW

MODEL LVCIFB
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B



*Contact Lansdale for UL Listing (BBP)


Size	R	S (Dia.)	T	U	Weight
3	4.0	5.0	.28	.50	36
4	5.5	6.0	.62	.50	55
6	7.0	7.0	.69	.62	85
8	8.38	9.0	.94	.88	145
10	9.75	9.0	.94	.88	210
12	11.25	11.0	1.0	1.0	300

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	



CAST IRON FLANGED 45° ELBOW

MODEL LVCIF45
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B


*Contact Lansdale for UL Listing (BBP)

45° Elbow			
Size (In)	A	Wgt.	T
2	2.5	12	.31
2½	3.0	17	.31
3	3.0	20	.38
4	4.0	40	.50
5	4.5	45	.50
6	5.0	55	.56
8	5.5	90	.62
10	6.5	130	.75
12	7.5	195	.81

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

CAST IRON FLANGED TEE

MODEL LVCIT
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

*Contact Lansdale for UL Listing (BBP)


Size	H	J	T	T1	Weight
2	4.5	4.5	.31	.31	20
2½	5.0	5.0	.31	.31	30
3 x 2	5.5	5.5	.38	.31	35
3 x 2½	5.5	5.5	.38	.31	38
3	5.5	5.5	.38	.31	40
4 x 2	6.5	6.5	.50	.31	50
4 x 2½	6.5	6.5	.50	.31	55
4 x 3	6.5	6.5	.50	.38	60
4	6.5	6.5	.50	.50	65
5	7.5	7.5	.50	.50	85
6 x 2	8.0	8.0	.56	.31	86
6 x 3	8.0	8.0	.56	.38	85
6 x 4	8.0	8.0	.56	.50	90
6 x 5	8.0	8.0	.56	.53	92
6	8.0	8.0	.56	.56	952
8 x 3	9.0	9.0	.62	.38	140
8 x 4	9.0	9.0	.62	.50	140
8 x 6	9.0	9.0	.62	.56	145
8	9.0	9.0	.62	.62	155
10 x 3	11.0	11.0	.75	.38	200
10 x 4	11.0	11.0	.75	.50	205
10 x 6	11.0	11.0	.75	.56	215
10 x 8	11.0	11.0	.75	.62	225
10	11.0	11.0	.75	.75	270
12 x 4	12.0	12.0	.81	.50	290
12 x 6	12.0	12.0	.81	.56	295
12 x 8	12.0	12.0	.81	.62	310
12 x 10	12.0	12.0	.81	.75	360
12	12.0	12.0	.81	.81	385

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		



CAST IRON FLANGED REDUCING TEE

MODEL LVCIRT
CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

*Contact Lansdale for UL Listing (BBP)

Size	H	L	T	T1	Weight
4 x 3 x 4	65	13.0	.50	.38	59
6 x 4 x 4	8.0	16.0	.56	.50	90
6 x 4 x 6	8.0	16.0	.56	.50	95
8 x 4 x 8	9.0	18.0	.62	.50	146
8 x 6 x 4	9.0	18.0	.62	.56	125
8 x 6 x 6	9.0	18.0	.62	.56	145
8 x 6 x 8	9.0	18.0	.62	.56	160
10 x 8 x 8	11.0	22.0	.75	.62	232
10 x 8 x 10	11.0	22.0	.75	.62	262
12 x 8 x 8	12.0	24.0	.81	.62	298
12 x 10 x 10	12.0	24.0	.81	.75	340
12 x 10 x 12	12.0	24.0	.81	.75	365

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

CAST IRON FLANGED CONCENTRIC REDUCER


MODEL LVCIFCR - CLASS 125

CAST IRON FLANGED ECCENTRIC REDUCER


MODEL LVCIFER - CLASS 125



**CONCENTRIC
MODEL LVCIFCR**

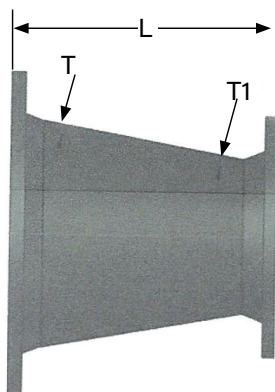

**ECCENTRIC
MODEL LVCIFER**

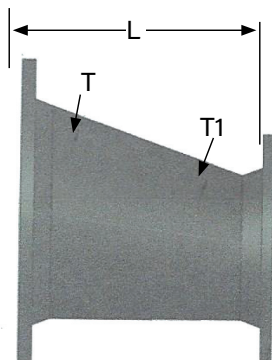

FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

*Contact Lansdale for UL Listing (BBP)

Size	L	T	T1	Weight
2 x 1	5.5	.31	.30	12
2 ½ x 2	5.5	.31	.30	14
3 x 1½	6	.38	.30	15
3 x 2	6	.38	.30	16
3 x 2½	6	.38	.31	20
4 x 2	7	.50	.31	25
4 x 2½	7	.50	.31	28
4 x 3	7	.50	.38	30
5 x 2½	8	.50	.31	31
5 x 3	8	.50	.38	32
5 x 4	8	.50	.50	39
6 x 2	9	.56	.31	35
6 x 2½	9	.56	.31	38
6 x 3	9	.56	.38	40
6 x 4	9	.56	.50	45
6 x 5	9	.56	.50	50
8 x 3	11	.62	.38	57
8 x 4	11	.62	.50	65
8 x 5	11	.62	.50	70
8 x 6	11	.62	.56	75
10 x 4	12	.75	.50	85
10 x 5	12	.75	.50	88
10 x 6	12	.75	.56	90
10 x 8	12	.75	.62	110
12 x 4	14	.81	.50	120
12 x 6	14	.81	.56	130
12 x 8	14	.81	.62	145
12 x 10	14	.81	.75	170

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		



CAST IRON FLANGED CROSS


MODEL LVCICR

CLASS 125



FEATURES:

- Drilled and Faced to ASME C110/A21.10
- Available Black and Galvanized (ASTM A-153)
- **Pressure Rating:** 200 psi @ 150° F
- **Threads:** B 1.20.1
- **Material:** Cast Iron ASTM A 126 A or B

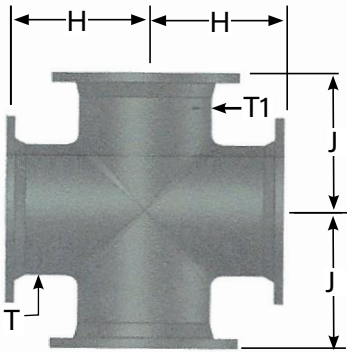

*Contact Lansdale for UL Listing (BBP)

Size	H	J	T	T1	Weight
2	4.5	4.5	.31	.31	30
2½	5.0	5.0	.31	.31	39
3	5.5	5.5	.38	.31	50
4	6.5	6.5	.50	.50	80
5	7.5	7.5	.50	.50	105
6 x 4	8.0	8.0	.56	.50	110
6	8.0	8.0	.56	.56	120
8 x 4	9.0	9.0	.62	.50	155
8 x 6	9.0	9.0	.62	.56	165
8	9.0	9.0	.62	.62	195
10 x 6	11.0	11.0	.75	.56	240
10 x 8	11.0	11.0	.75	.62	265
10	11.0	11.0	.75	.75	330
12 x 6	12.0	12.0	.81	.56	320
12 x 8	12.0	12.0	.81	.62	345
12 x 10	12.0	12.0	.81	.75	415
12	12.0	12.0	.81	.81	460

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	