

GROOVED GEAR OPERATED BUTTERFLY VALVE MODEL LV-LTV




FEATURES:

Lansdale's Grooved Gear Operated Butterfly Valve Model LV-LTV are indicating type valves designed for use in commercial plumbing and HVAC systems where a visual indication is required as to whether the valve is open or closed.

They are used, for example, as system control valves and Isolation valves.

They have grooved inlet and outlet connections that are suitable for use with grooved end pipe couplings that are approved for commercial plumbing and HVAC systems.

- Rated for 300 PSI
- Ductile iron ASTM 536 body & disc
- Body Epoxy coated
- Disc EPDM, FKM, or NBR encapsulated

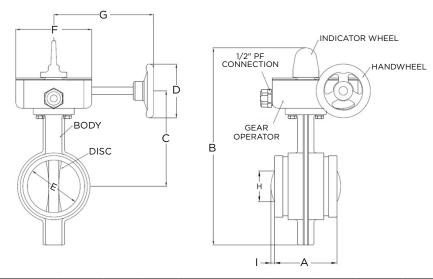

Nominal Valve Size (In.)	Pipe OD (In.)	Nominal Dimensions (In.)									Weight (Lbs.)
		Α	В	С	D	E	F	G	н	I	
10	10.75	6.5	22.46	11.1	8.86	10.75	5.51	8.19	7.21	1.65	73.40
12	12.75	6.5	25.39	12.2	8.86	12.75	5.51	8.19	9.96	2.7	89.30

PROJECT	APPROVAL STAMP
PROJECT:	□ APPROVED
ADDRESS:	□ APPROVED AS NOTED
ENGINEER:	□ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

www.LansdaleValve.com