

LANSDALE

VALVE & MANUFACTURING

www.breccocorp.com


Complete Hose Rack Assembly 2.5" x 1.5"

Our complete 2-1/2" x 1-1/2" Hose Rack Stations come with UL/ULC Listed and FM Approved red swing rack, UL and FM approved 2-1/2" x 50' and 1-1/2" x 25' rack hose with brass coupled ends, 2-1/2" rack nipple, UL and FM approved 2-1/2" FxF angle hose valve, 2-1/2" x 1-1/2" brass reducer, and UL and FM approved 1-1/2" Straight nozzle. The hose rack assembly is a Class II Service and is an immediate and readily available means of controlling and suppressing fire by one person. The semi-automatic swing rack features an automatic release mechanism keeping water out of the hose (when valve is open) until the last fold is released.




Rack Nipple:

A = 4.16
B = Regional Thread
C = 2.5" NPT




Hose Valve:

A = 5"
B = 3-3/16"
C = 11" (OPEN)
C = 9-1/4" (CLOSED)
Working Pressure: 300 lb

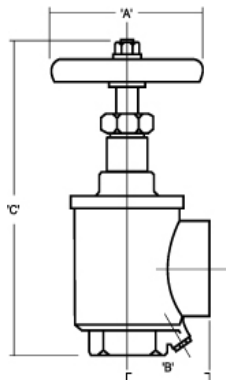


Fog Nozzle:

A = 2.45"
B = 2.47"
C = 4.8" Closed



Swing Rack:

A - 22"
B - 4.16"
C - 2.2"
D - 2.91"

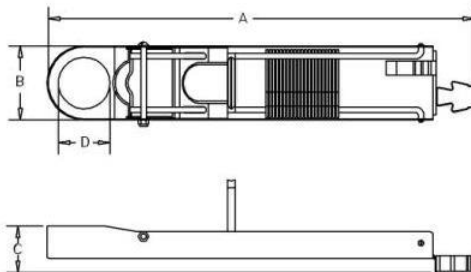

Hose Specs :

Hose Size: 1 1/2"
Service Pressure: 250 PSI
Proof Pressure: 500 PSI
Burst Pressure: 750 PSI
Weight (uncoupled): 10lbs

The information contained herein is believed to be reliable but is for guidance only. Brecco Distribution and its agents cannot assume liability for results obtained in the use of its products by the persons whose methods are outside or beyond our control. It is the user's responsibility to determine the suitability of any products, methods of use, or preparation prior to use, mentioned in our literature. It is the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of any of our products.