

LANSDALE

VALVE & MANUFACTURING

1040 Broadway Westville, NJ 08093 / Phone: (800)908-0523 / Fax: (856)456-9223 / www.gemfiresprinkler.com

COMPLETE HOSE RACK ASSEMBLY


2 1/2" x 1 1/2"

Our complete 2 1/2" x 1 1/2" Hose Rack Stations come with UL/ULC Listed and FM Approved red swing rack, UL and FM Approved 2-1 1/2" x 50' and 1-1 1/2" x 25' rack hose with brass coupled ends, 2-1/2" F x F angle hose valve, 2-1/2" x 1-1/2" brass reducer, and UL and FM Approved 1-1/2" Straight nozzle. The hose rack assembly is a Class II Service and is an immediate and readily available means of controlling and suppressing fire by one person. The semi-automatic swing rack features and automatic release mechanism keeping water out of the hose (when valve is open) until the last fold is released.




Rack Nipple

A= 4.16
B= Regional Thread
C= 2.5" NPT




Hose Valve

A= 5"
B= 3-3/16"
C= 11" (OPEN)
C= 9-1/4" (CLOSED)
Working Pressure: 300 lb

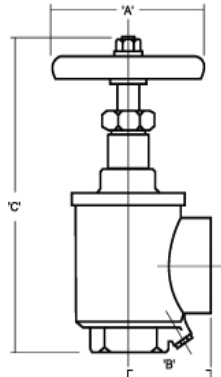


Fog Nozzle

A = 2.45"
B = 2.47"
C = 4.8" Closed



Swing Rack

A - 22"
B - 4.16"
C - 2.2"
D - 2.91"

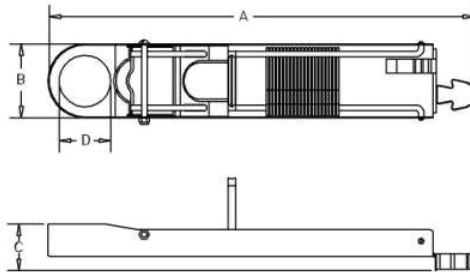

Hose Specs

Hose Size: 1 1/2"
Service Pressure: 250 PSI
Proof Pressure: 500 PSI
Burst Pressure: 750 PSI
Weight (uncoupled): 10lbs

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	