



5" STORZ X 4-1/2" INTEGRAL HYDRANT STORZ W/CAP & CABLE FOR WATEROUS & AFC HYDRANT MODEL LVSTZIHA

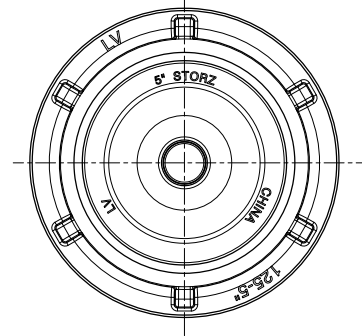

DESCRIPTION:

- Installed directly into hydrant and secured with hydrant's retaining rings
- For security purposes, a storz spanner wrench is required to remove the cap
- Cap opening torque requirement: 14.75 ft. lbs. to 25.82 ft. lbs.

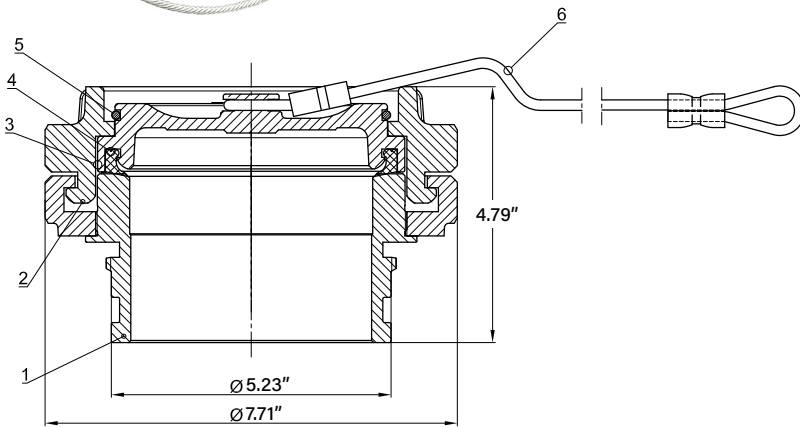

5" STORZ X 4-1/2" INTEGRAL HYDRANT STORZ W/ CAP & CABLE FOR WATEROUS HYDRANT

NO.	PART	MATERIAL ASTM SPECIFICATION	WEIGHT (lbs.)
1	Aluminum Connector Assembly	C83600+ Aluminum Alloy	8.21
2	Aluminum Connector-1	6061 (Aluminum Alloy)	2.08
3	Baffle Plate	6061 (Aluminum Alloy)	1.34
4	Sealing Ring	EPDM (A70+3)	.07
5	Retaining Ring	304	.08
6	Steel Wire Rope	—	.11

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	