

CONTINUOUS THREADED ROD

MODEL LVATR



Material Specifications

Size Range

1/4" through 1-1/2". Stocked in six, ten, and twelve foot lengths. Other even foot lengths can be furnished to order.

Material

Carbon steel. Available black, zinc-plated.

Threads

National Coarse (UNC)

Maximum Temperature

650° F

Compliance


MSS SP-58; ASTM A307Gr A

Ordering

Specify rod diameter, length, and finish.

Product Overview

Lansdale's, "All Threaded Rod" is a fully threaded carbon steel rod with standard right hand UNC machine running thread. It can be ordered in pre-cut six, ten and twelve ft lengths and then cut to size in the field to meet whatever hanger lengths are required. Custom lengths are available on request.

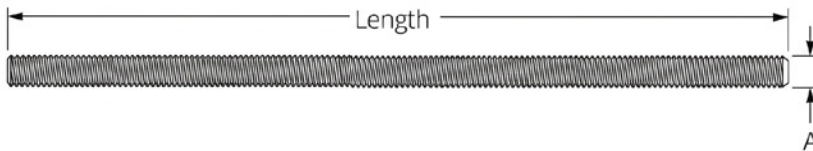

CONTINUOUS THREADED ROD, MODEL LVATR

Rod Size (in.) A	Threads per (in.)	Max Load 650°F	Weight per ft. (lbs.)
1/4	20	240	0.12
3/8	16	730	0.30
1/2	13	1,350	0.53
5/8	11	2,160	0.84
3/4	10	3,230	1.20
7/8	9	4,480	1.70
1	8	5,900	2.30
1-1/4	7	9,500	3.60
1-1/2	6	13,800	5.10

For more information

Learn more about Lansdale Valve's LVATR and other products available by visiting www.lansdalevalve.com

Lansdale Valve & Manufacturing

1040 Broadway
Westville, New Jersey 08093

PROJECT INFORMATION	APPROVAL STAMP
Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	