

# POST INDICATOR VALVE WITH FLANGE ENDS


MODEL - LVPIVFF, LVPIVMJMJ



## FEATURES:

- Valves comply with AWWA C515-15 Standard
- Non-Rising Stem, resilient seated (EDPM encapsulated wedge)
- Triple O-Ring Seal
- Available with optional test plug on valve body (special order)
- Post Indicator Valves provided with universal "Indicator Post Plate"
- Mechanical Joint Ends to AWWA C153/A21.53
- Flanged Ends to ANSI B16.1, CLASS 125
- UL/Listed/FM Approved at 300 PSI water working pressure rating
- NSF-61 and NSF-372 certified as lead-free for use in drinking water systems
- Temperature range: 42°-180° F
- Fusion bonded epoxy coated interior and exterior to AWWA C550 standard
- Flanged Valves available with hand wheel or operating nut

\*Flanged ends shown, LVPIVFF.  
Available with Mechanical Joint  
(MJ) ends. Model # LVPIVMJMJ

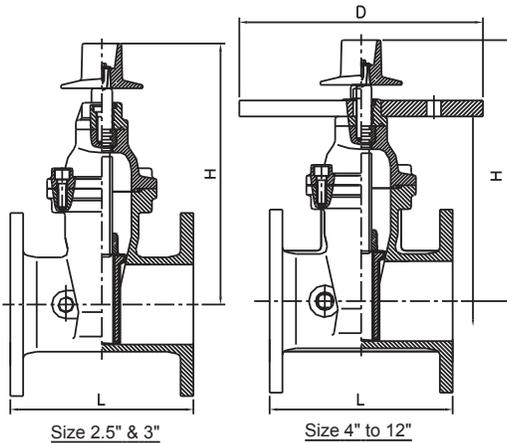

MATERIAL SPECIFICATIONS		
PART	MATERIAL	ASTM SPEC.
Body	Ductile Iron	A536 65-45-12
Wedge	Ductile Iron	EPDM Encapsulated
Wedge Nut	Bronze	B62 C83600
Stem	Stainless Steel	ISI 304
Bonnet	Ductile Iron	A536 65-45-12
Gasket	Rubber	EPDM
Gland	Ductile Iron	A536 65-45-12
Thrust Collar	Bronze	B62 C83600
O-Ring	Rubber	EPDM
Post Flange	Ductile Iron	A536 65-45-12
Operating Nut	Ductile Iron	A536 65-45-12
NPT Plug	Bronze	Commercial
Post Flange	Bolt	Stainless Steel AISI 316
Bonnet Bolt	Stainless Steel	AISI 304

VALVE DIMENSIONS							
Size (In.)	3	4	5	6	8	10	12
L (In.)	8	9	10	10½	11½	13	14
H (In.)	11⅝	13¾	16⅞	17 5/16	21 7/16	25 3/8	28 3/4
D (In.)		12	12	12	12	12	12
Weight (Lbs.)	41	64	79	103	161	235	339

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	