
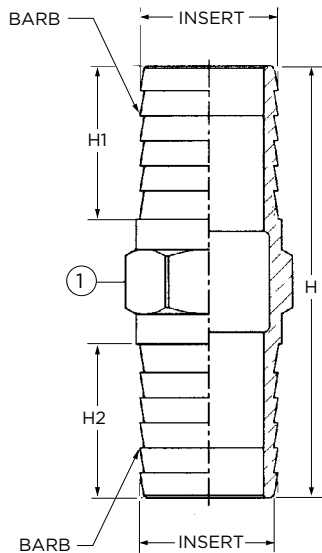


LEAD-FREE BRONZE INSERT COUPLING

MODEL LVIFCNL



DESCRIPTION:

- Complies with NSF/ANSI 372-2010
- For use with Polyethylene ASTM D2662 SDR 7, Polyethylene ASTM D2239 SDR 7, or Polyethylene ASTM D2239 SDR 9 tubing
- NO LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead
- Material: All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C87850)

BRONZE INSERT ADAPTER DIMENSIONS (in.)

NOMINAL SIZE		BARB	H	H1	H2	INSERT A	INSERT B
INSERT	INSERT						
3/4	3/4	6	3.58	1.40	1.40	0.83-0.86	0.83-0.86
1	3/4	5 & 6	3.58	1.20	1.40	1.06-1.09	0.83-0.86
1	1	5	3.51	1.20	1.20	1.06-1.09	1.06-1.09
1-1/4	1	5	3.39	1.20	1.20	1.39-1.42	1.06-1.09
1-1/4	1-1/4	6	3.39	1.20	1.20	1.39-1.42	1.39-1.42
1-1/2	1	8 & 6	4.18	1.79	1.40	1.62-1.66	1.06-1.09
1-1/2	1-1/2	8	4.49	1.79	1.79	1.62-1.66	1.62-1.66
2	2	8	4.52	1.79	1.79	2.08-2.12	2.08-2.12

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	